

**060-4PS**

- 4" swivel
- Plain bore
- Payron semi-steel wheel



**061-5UM**

- 5" rigid
- Anti-friction roller bearing
- Plexite phenolic wheel

**060/061**  
**LIGHT MEDIUM**

**SANITARY CASTERS**

The 060 is a light medium caster with two precise bearing swivel raceways, heat-treated for longer service and embossed for extra strength.

**Applications:**

For equipment in the range of 200 to 1200 lbs. Ideally suited for warehouse carts, furniture and appliance trucks, equipment for hospitals, stores, hotels, etc.

**Engineering Data:**

- 1/2" hydraulically upset kingpin.
- .187" thick steel top plate.
- Large diameter raceways; hardened.
- Stylish wrap-around heat-treated bracket of cold rolled steel.


**Standard Features/Components:**

- Zinc plated finish.
- 3/8" shoulder bolt axle.
- Roller bearing wheels have 1/2 x 3/8 x 1 1/8" spanner.

**Companion "060" Rigid:**

Embossed legs welded to top plate.

**Raceway Construction:**

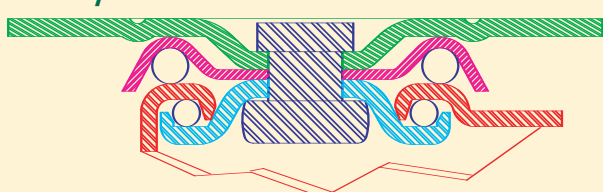


**Wheels & Optional Extras:**




**Payrock Hard Tread**  
rubber fibrous compound




**Peejay**  
polyolefin plastic



**Plexite Phenolic**  
macerated canvas



**Payron Semi-Steel**  
high tensile sintered iron



**Mirakush**  
85 duro. gray polyurethane



**Miratek**  
95 duro. red polyurethane



**Payflex Soft Rubber**  
non-marking tread



**WS Wheel Seals**  
locks out foreign matter



**WK Brake**  
locks wheel, not used with Thread Guards, swivel only



**SK Brake**  
locks wheel & swivel simultaneously. Available: 3 1/2, 4, 5, 6" wheels only



**TG Thread Guards**  
cannot be used with WK brakes

060 SWIVEL & 061 RIGID SPECIFICATIONS											
WHEEL SPECIFICATIONS				CATALOG NUMBER				Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	Top Plate inches
Diameter inches	Width inches	Type	Cap Each lbs	Swivel Plain, Oilite, Delrin Bearings		Rigid Plain, Oilite, Delrin Bearings					
3	1 1/4	Payron	300	060-3PS	060-3US	061-3PS	061-3US	2 3/4	2 7/8	4 1/8	Width by Length: 3 3/4 x 4 5/8  Bolt Hole Spacing: 2 5/8 x 3 3/8 slotted to 3 x 3  Size of Bolt Holes: 2 5/16
	1 3/8	Payflex	150	060-3OX		061-3OX					
		Payrock	270	060-3OH		061-3OH					
	1 1/4	Plexite	300		060-3UM		061-3UM				
3 1/2	1 1/4	Payflex	200	060-3 1/2OX		061-3 1/2OX		2 1/2	3 5/8	4 1 3/8	
		Payrock	280	060-3 1/2OH		061-3 1/2OH					
	1 3/8	Mirakush	200	060-3 1/2DR	060-3 1/2BR	061-3 1/2DR	061-3 1/2BR	2 1/4			
		Miratek	250	060-3 1/2DF	060-3 1/2BF	061-3 1/2DF	061-3 1/2BF				
4	1 3/8	Payron	400	060-4PS		061-4PS		4 1/4	3 3/8	5 1/8	
	1 1/4	Payflex	200	060-4OX		061-4OX					
		Payrock	290	060-4OH		061-4OH					
	1 3/8	Plexite	375		060-4UM		061-4UM	2 3/4			
		Mirakush	200	060-4DR	060-4BR	061-4DR	061-4BR				
1 1/4	Miratek	240	060-4DF	060-4BF	061-4DF	061-4BF	2 3/8				
5	1 1/2	Payflex	220	060-5OX		061-5OX		3 3/8	4 5/8	6 1/8	
	Payrock		310	060-5OH		061-5OH					
	1 3/8	Plexite	350		060-5UM		061-5UM	2 3/4			
		Mirakush	200	060-5DR	060-5BR	061-5DR	061-5BR				
	1 1/4	Miratek	240	060-5DF	060-5BF	061-5DF	061-5BF				
1 3/8	Peejay	280	060-5PJ		061-5PJ						
6	1 3/8	Payflex	250	060-6OX		061-6OX		3 3/4	4 1 3/8	7 1/8	
		Payrock	340	060-6OH		061-6OH					
	1 1/4	Mirakush	275	060-6DR	060-6BR	061-6DR	061-6BR	3			
		Miratek	325	060-6DF	060-6BF	061-6DF	061-6BF				