


800-10TL

- 10" swivel
- Tapered roller bearing
- Paythane polyurethane on cast iron wheel

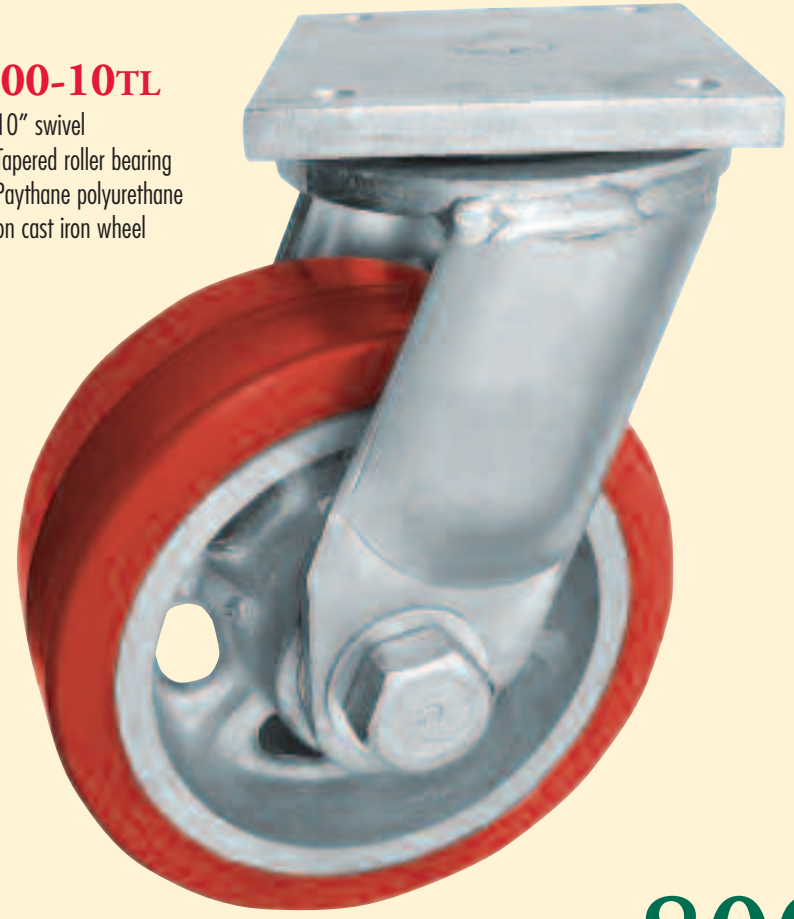

801-6TD

- 6" rigid
- Tapered roller bearing
- Payductile cast iron wheel



800/801

EXTRA HEAVY

The 800 will carry the heaviest loads—4 units up to 40,000 lbs.


Engineering Data:

- 5/8" steel top plate.
- 1 1/4" welded king bolt.
- 1 1/4" Timken tapered thrust bearing.
- 5" sealed type Timken load raceway.
- 3/8" embossed legs welded inside and out to support base.

Standard Features/Components:

- Zinc plated finish.
- 1 1/4" axle.
- 1 1/2 x 1 1/4 x 4 5/8" hardened spanners.
- Lubrication fittings.
- Companion rigid.

Raceway Construction:

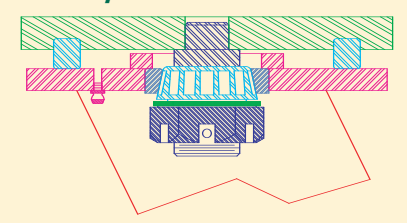


Wheels & Optional Extras:



Paythane
polyurethane bonded to a metal center



Payductile Steel
cast high tensile ductile iron




Plexite Phenolic
macerated canvas



V-groove
machine grooved steel



WB Brake
shoe locks wheel



SL 4-Position Swivel Lock
plunger engages at 90° angles

800 SWIVEL & 801 RIGID SPECIFICATIONS											
WHEEL SPECIFICATIONS				CATALOG NUMBER				Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	Top Plate inches
Diameter inches	Width inches	Type	Cap Each lbs	Swivel		Rigid					
				Roller Bearings	Timken Bearings	Roller Bearings	Timken Bearings				
6	4	Payductile	8000/10000	800-6UD	800-6TD	801-6UD	801-6TD	41	5 1/4	9	Width by Length: 6 1/2 x 7 1/2
		Paythane	4850	800-6UL	800-6TL	801-6UL	801-6TL	38			
8	4	Payductile	8000/10000	800-8UD	800-8TD	801-8UD	801-8TD	55	6 1/2	11	
		Paythane	4850	800-8UL	800-8TL	801-8UL	801-8TL	47			
		V-Groove	10000	800-8UDG	800-8TDG	801-8UDG	801-8TDG	52			
10	4	Payductile	8000/10000	800-10UD	800-10TD	801-10UD	801-10TD	68	7 3/4	13	
		Paythane	4850	800-10UL	800-10TL	801-10UL	801-10TL	59			
		V-Groove	10000	800-10UDG	800-10TDG	801-10UDG	801-10TDG	64			
12	4	Payductile	8000/10000	800-12UD	800-12TD	801-12UD	801-12TD	74	8 3/4	15	Size of Bolt Holes: 5/16
		Paythane	4850	800-12UL	800-12TL	801-12UL	801-12TL	65			
	3 1/2	Plexite	4000	800-12UM	800-12TM	801-12UM	801-12TM	45			

• Weights shown represent swivels; Rigid caster weigh approximately 15% less. Maximum capacity for Payductile wheels with roller bearings is 8000 lbs.