

# Scaffold Casters

## HEAVY DUTY SERIES


Up to 12" wheels, including Full Pneumatic! The "403-SB" has been engineered for heavy duty towers. Alemite fittings for swivel and wheel. Hardened swivel raceways. The formed and hardened brake shoe locks both the swivel and the wheel at the same time. Various stem sizes available. See table below.

**WARNING DO NOT RIDE ROLLING TOWERS!**

Check that caster is securely locked before climbing scaffolding. Do not attempt to use if caster is faulty or has not been maintained.

### 403-10UV-SB-A

- 10" swivel
- Bronco rubber on aluminum center
- Anti-friction roller bearing

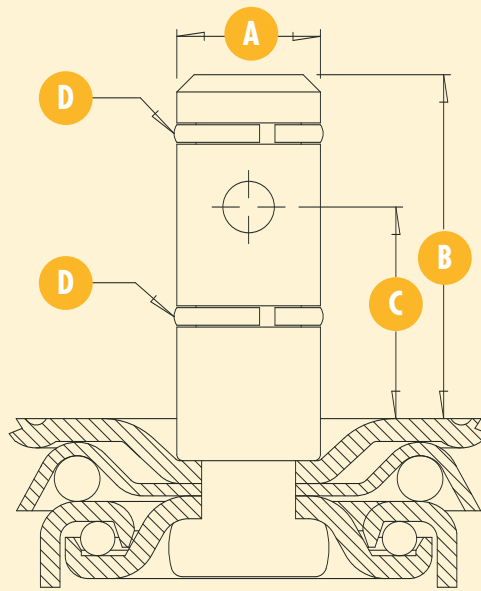

### 403-SB STEMS AVAILABLE

Stem #	A: Diameter	B: Length	C: Pin Hole	D: Rings
A	1 3/8	4	7/16 up 2 1/8	-
C	1 7/16	4	7/16 up 2 1/8	-
E	1 3/8	4	7/16 up 2 1/4	-
F	1 1/4	4	7/16 up 2 3/8	-
G	1	4	7/16 up 2 3/8	-
H	1 7/16	4	-	2
I	1 1/4	4	7/16 up 2 1/2	-
J	1 3/8	4	7/16 up 3	-
K	1 3/8	4	7/16 up 2	-
L	1 7/16	4	7/16 up 2 1/4	-

403-SB SCAFFOLD SERIES, HEAVY DUTY									
WHEEL SPECIFICATIONS				CATALOG NUMBER	Approx. Weight	Swivel Radius	Height Less Stem	STEM DIMENSIONS*	
Diameter inches	Width inches	Type	Cap Each lbs	Roller Bearings	lbs	inches	inches	Standard in	Variations Available in
8	3	Bronco	840	403-8UV-SB	17 1/2	6 1/2	10 1/4	See Stem Table Above. The A Stem is Standard, 1 3/8 x 4, with 7/16 hole 2 1/8 up O.C.	See Stem Table Above.
		Mirakush	1000	403-8UK-SB					
		Miratek	1280	403-8UT-SB					
		Full Pneumatic	300**	403-8UW-SB					
10	3	Bronco	1000	403-10UV-SB	20	7 3/8	12 1/4		
		Mirakush	1280	403-10UK-SB					
		Miratek	1500	403-10UT-SB					
		Full Pneumatic	515**	403-10UW-SB					
12	3	Bronco	1140	403-12UV-SB	24	8 3/8	14 1/2		
		Mirakush	1360	403-12UK-SB					
		Miratek	1600	403-12UT-SB					
		Full Pneumatic	700**	403-12UW-SB					
	4	Full Pneumatic	700**	403-12UW-SB					

\*When ordering, be sure to specify Suffix Stem Letter, as per Stem Table above, i.e. Model 403-12UW-SB-A. If no particular Stem is specified, the Standard Stem will automatically be furnished.  
\*\*When inflated to 50 lbs. and operated under 5 m.p.h.

# Scaffold Casters

## MEDIUM & HEAVY PLATE BRAKE


Using the same principle as the "SB" Series, the embossed shoe brake engages the notched top swivel raceway and the wheel simultaneously. Both swivel raceways are hardened for longer wear. Grease fittings are standard with every model, in the wheel as well as the swivel. Electro-plated finish. Nut and bolt axles. With the "200-SK" Series, additional top plate sizes are available.

**WARNING DO NOT RIDE ROLLING TOWERS!**

Check that caster is securely locked before climbing scaffolding. Do not attempt to use if caster is faulty or has not been maintained.

### 200-6UN-SK-B

- 6" rubber on aluminum
- SK total lock brake

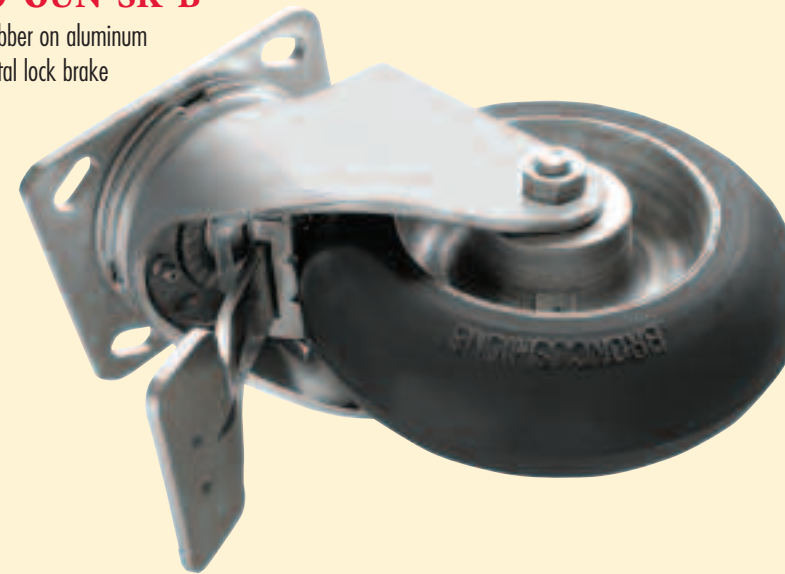

### 400-12UL-PB

- 12" polyurethane on aluminum
- PB brake locks swivel and wheel
- Anti-friction roller bearing



200-SKB & 400-PB PLATE BRAKE SERIES, SWIVEL											
WHEEL SPECIFICATIONS				CATALOG NUMBER	Approx. Weight	Swivel Radius	Height Over-All	TOP PLATE			
Diameter inches	Width inches	Type	Cap Each lbs	Roller Bearings	lbs	inches	inches	Width x Length inches	Bolt Hole Spacing inches	Size of Bolt Holes inches	
5	2	Bronco	350	2005UV-SK-B	9	4 1/8	6 1/2	5 X 5 1/2	4 1/8 x 4 1/2	3/8	
		Mirakush	450	200-5UK-SK-B							
6	2	Bronco	410	200-6UV-SK-B	10	5	7 1/2				
		Mirakush	540	200-6UK-SK-B							
8	2	Bronco	500	200-8UV-SK-B	12	6 3/8	9 1/2				
		Mirakush	700	200-8UK-SK-B							
10	3	Mirakush	1480	400-10UK-PB	20	7 3/8	12 1/2	4 3/4 x 6 3/8	2 7/8 x 4 1 1/8 slotted to 3 3/8 x 5 1/4	3 3/4	
		Miratek	2000	400-10UT-PB							
		Full Pneumatic	515*	400-10UW-PB							
12	3	Mirakush	1700	400-12UK-PB	24	8 3/8	14 3/4				
		Miratek	2100	400-12UT-PB							
		Full Pneumatic	700*	400-12UW-PB							
	4	Full Pneumatic	700*	400-12UW-PB							

\*When inflated to 50 lbs. and operated under 5 m.p.h.