



ST190-6DK

- 6" swivel
- Delrin bearing
- Mirakush polyurethane wheel



ST191-8DM

- 8" rigid
- Delrin bearing
- Plexite phenolic wheel

ST190/ST191
MEDIUM HEAVY STAINLESS

The "190 Stainless" has a double ball raceway. Constructed of stainless steel.

Applications:

For equipment in the load range of 325 to 3400 lbs. Ideal for food service equipment, wash down and stem clean applications, hospitals, laundries, dairies, large bakery racks, corrosive environments, etc.


Standard Features/Components:

- Polished stainless finish.
- 1/2" stainless axle.
- 5/8" nut and bolt kingpin.

Companion 191 Stainless Rigid:

Solid construction, embossed legs for extra strength.


Raceway Construction:

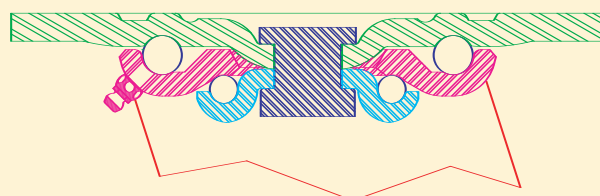


Wheels & Optional Extras:




Miratek
95 duro. red polyurethane




Mirakush
85 duro. gray polyurethane




Peejay
polyolefin plastic



Plexite Phenolic
macerated canvas



Durakush
thermo-plastic elastomer



Bronco Mold-On
rubber bonded to aluminum center



WK Brake
locks wheel, not used with Thread Guards, swivel only

ST190 SWIVEL & DT191 RIGID SPECIFICATIONS

WHEEL SPECIFICATIONS				CATALOG NUMBER				Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	Top Plate inches	
Diameter inches	Width inches	Type	Cap Each lbs	Swivel		Rigid						
				Plain Bearings	Delrin Bearings	Plain Bearings	Delrin Bearings					
4	2	Phenolic	500		ST190-4DM		ST191-4DM	5	3 1/6	5 5/8	Width by Length: 4 x 4 1/2	
		Miratek	300		ST190-4DT		ST191-4DT					
		Mirakush	380		ST190-4DK		ST191-4DK					
		Bronco	325		ST190-4DV		ST191-4DV					
		Durakush	350		ST190-4DE		ST191-4DE					
		Polyolefin	450	ST190-4PJ	ST190-4DJ	ST191-4PJ	ST191-4DJ					
5	2	Phenolic	700		ST190-5DM		ST191-5DM	5 1/2	3 3/8	6 1/2		Bolt Hole Spacing: 2 5/8 x 3 3/8 slotted to 3 x 3
		Miratek	700		ST190-5DT		ST191-5DT					
		Mirakush	450		ST190-5DK		ST191-5DK					
		Bronco	375		ST190-5DV		ST191-5DV					
		Durakush	375		ST190-5DE		ST191-5DE					
		Polyolefin	550	ST190-5PJ	ST190-5DJ	ST191-5PJ	ST191-5DJ					
6	2	Phenolic	850		ST190-6DM		ST191-6DM	7	4 1/2	7 1/2	Size of Bolt Holes: 3/8	
		Miratek	820		ST190-6DT		ST191-6DT					
		Mirakush	700		ST190-6DK		ST191-6DK					
		Bronco	450		ST190-6DV		ST191-6DV					
		Durakush	450		ST190-6DE		ST191-6DE					
		Polyolefin	850	ST190-6PJ	ST190-6DJ	ST191-6PJ	ST191-6DJ					
8	2	Phenolic	850		ST190-8DM		ST191-8DM	8	6	9 1/2		
		Miratek	850		ST190-8DT		ST191-8DT					
		Mirakush	700		ST190-8DK		ST191-8DK					
		Bronco	450		ST190-8DV		ST191-8DV					
		Durakush	450		ST190-8DE		ST191-8DE					
		Polyolefin	750	ST190-8PJ	ST190-8DJ	ST191-8PJ	ST191-8DJ					

Option: For brakes, add suffix -WK.

• Rigid casters weight approximately 15% less than swivels.