

Scaffold Casters

STANDARD & LIGHT SERIES

203-SK Standard Series:


The latest technology that Payson has to offer in smooth, double breaking action. The upper spring steel clip locks the serrated bottom cup while the lower spring steel engages the wheel.

193-SB Standard Series:

Embossed and hardened brake shoe engages notched plate and wheel surface simultaneously.

053-SK Light Series:

Truly economical, but strong. This janitorial scaffolding caster series has been designed for those light duty applications, in which both strength and economy are important considerations. Both ball bearing raceways are heat-treated for long service. Press the handle "Down" and both the swivel and wheel are securely locked. Lift "Up" and you're ready to roll freely. Nut and bolt axles render the wheel replaceable. Zinc plated.

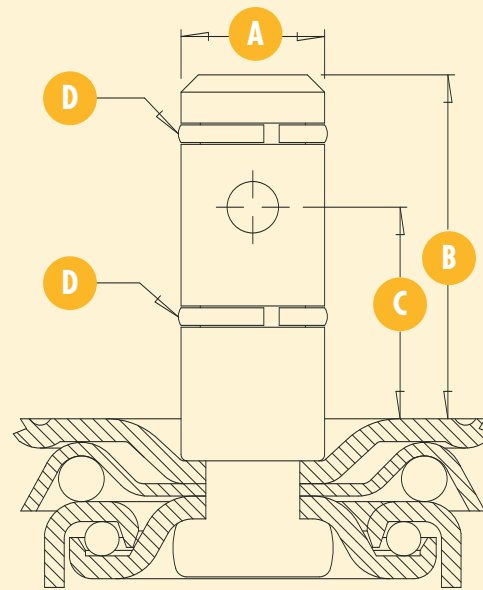

203-SK STEMS AVAILABLE

Stem #	A: Diameter	B: Length	C: Pin Hole	D: Rings
A	1 3/8	4	7/16 up 2 1/8	-
C	1 7/16	4	7/16 up 2 1/8	-
E	1 3/8	4	7/16 up 2 1/4	-
F	1 1/4	4	7/16 up 2 3/8	-
G	1	4	7/16 up 2 3/8	-
H	1 7/16	4	-	2
I	1 1/4	4	7/16 up 2 1/2	-
J	1 3/8	4	7/16 up 3	-
K	1 3/8	4	7/16 up 2	-
L	1 7/16	4	7/16 up 2 1/4	-

053-SK STEMS AVAILABLE

Stem #	A: Diameter	B: Length	C: Pin Hole	D: Rings
A	1	4	-	1
B	.845	2 1/2	-	1
C	.875	2 1/2	-	1
D	1.047	2 3/4	-	1
E	1 1/4	2 7/16	7/16 up 1	-

WARNING DO NOT RIDE ROLLING TOWERS!
Check that caster is securely locked before climbing scaffolding.
Do not attempt to use if caster is faulty or has not been maintained.

203-SK SCAFFOLD SERIES, SWIVEL												
WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	STEM DIMENSIONS*			
Diameter inches	Width inches	Type	Cap Each lbs	Oilite, Delrin Bearings	Roller Bearings				Standard Size inches	Top Plate		
5	2	Payflex	325	203-50X-SK	203-50V-SK	9 1/2	4 5/16	6 1/2	The A Stem, 1 3/8 x 4 with 7/16 pin hole, 2 3/8 on center up from base.	See Stem Table above. Consult Factory for additional sizes.		
		Bronco	375								203-5UW-SK	
		Mirakush	500								203-5DK-SK	203-5UK-SK
		Payvulc	375									203-5UP-SK
6	2	Payflex	400	203-60X-SK	203-6UV-SK	10 1/2	5	7 1/2				
		Bronco	410								203-6UK-SK	
		Mirakush	550								203-6DK-SK	203-6UK-SK
		Payvulc	410									203-6UP-SK
8	2	Bronco	500	203-8DK-SK	203-8UV-SK	12	6 3/16	9 1/2				
		Mirakush	7000		203-8UK-SK							
		Payvulc	500		203-8UP-SK							

*When ordering, be sure to specify Suffix Stem Letter, as per Stem Table above, i.e., Model 203-8UK-SK-A (Standard Stem) or Model 203-8UV-SK-C, which is described in detail in the above Stem Table. If no particular Stem is specified, the Standard Stem will automatically be furnished.



203-8UV-SK-A

- Standard Series
- Smooth, double breaking action
- Upper spring clip locks serrated bottom cup while lower spring steel engages wheel.

053-5BF-SK-A

- Light Series
- Your choice of stem sizes
- Double ball bearing swivel raceways, heat treated
- Embossed shoe brake engages notched top plate and wheel surface simultaneously.
- Self lubricating bearings. Zerk axles available with Mirakush and Miratek wheels.



193-8UP-SB-A

- Standard Series
- Embossed & hardened brake shoe
- Shoe engages notched plate and wheel simultaneously.

193-SB SCAFFOLD SERIES, SWIVEL										
WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	STEM DIMENSIONS*	
Diameter inches	Width inches	Type	Cap Each lbs	Oilite, Delrin Bearings	Roller Bearings				Standard Size inches	Top Plate
8	2	Payvulc	500		193-8UP-SB-A	12	6 3/16	9 1/2	"A" Standard Stem Only	

*When ordering, be sure to specify Suffix Stem Letter, as per Stem Table on left, i.e., Model 203-8UK-SK-A (Standard Stem) or Model 203-8UV-SK-C, which is described in detail in the Stem Table. If no particular Stem is specified, the Standard Stem will automatically be furnished.

053-SK LIGHT DUTY SCAFFOLD SERIES, SWIVEL											
WHEEL SPECIFICATIONS				CATALOG NUMBER		Approx. Weight lbs	Swivel Radius inches	Height Over-All inches	STEM DIMENSIONS*		
Diameter inches	Width inches	Type	Cap Each lbs	Oilite Bearings	Ball Bearings				Standard Size inches	Top Plate	
5	1 1/4	Payflex	190	053-50X-SK	053-5BR-SK	6	4 5/16	6 1/16	The A Stem, 1 x 4 with friction ring.	See Stem Table above. Consult Factory for additional sizes.	
		Mirakush	200								053-5BF-SK
		Miratek	240								
16	1 1/8	Payflex	240	053-60X-SK	053-6BR-SK	6 1/2	4 13/16	7 1/16			
		Mirakush	275								053-6BF-SK
		Miratek	300								

*When ordering, be sure to specify Suffix Stem Letter, as per Stem Table on left, i.e., Model 053-50X-SK-A (Standard Stem) or Model 053-6BR-SK-B, which is described in detail in the Stem Table. If no particular Stem is specified, the Standard Stem will automatically be furnished.